

Technical Specifications

Type	2-way
Principle	Closed housing
Rated power	50 W
Maximum power	80 W
Frequency range	50 ... 25.000 Hz
Crossover frequency	1.600 Hz
Nominal impedance	8 Ohm
Sensitivity	83 dB
Ambient temperature	-40...70°C / -22...158°F
Humidity	100% r.H.
Tweeter Ø	25 mm / 1"
Tweeter dome material	Silk, polymer coated
Woofer Ø	140 mm / 5,5"
Woofer cone material	Polypropylene
Mesh material	Galvanized steel
Finish	matt
Safety rating	IP64
Dimensions (H*W*D)	216*150*143 mm / 8,5*5,9*5,6"
Weight	2,6kg



For more information and frequently asked questions, visit:

quadral.com/faq

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria

Loxone UK
The Forum
Station Road
Theale, RG7 4RA
United Kingdom



For additional information, declaration of conformity, visit www.loxone.com/datasheets



Satellite Speaker IP64 Passive


Need Help?
loxone.com/support




Part No.: 610155

Installation manual


1. Step: Loosen the loudspeaker using the swivel joint of the mounting bracket (hex key 4).

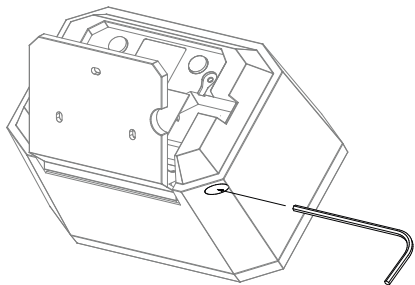


2. Step: Fasten the speaker to the wall with 3 screws. Use the correct plugs for the wall.



3. Step: Loosen the metal cover above the terminal on the back and the strain relief behind it.




4. Step: Insert the stripped connection cable into the recess and screw the strands into the respective terminal holes.



Stripping length = 7mm.

Wire cross section = 1,5mm².

5. Step: Screw the strain relief onto the cable.

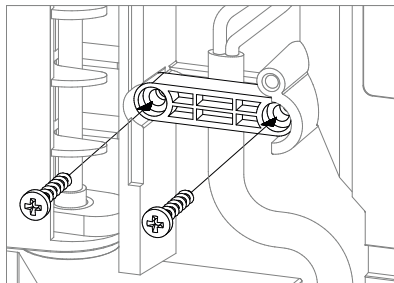

6. Step: Close the speaker again by following the previous steps backwards and align the speaker to your liking.

For more information and our FAQ, visit us:

quadral.com/faq

Safety wire can be purchased separately
Part No.: 610167

