



## About the product


The WALL Speaker is a flexible 2-way speaker that was specially developed for use close to the wall. The speaker harmonizes perfectly with the Loxone Audioserver and can be installed vertically or horizontally thanks to the integrated wall mount. All components are optimized for low distortion and high detail resolution. To make the most out of the full potential of the speaker, we recommend wall mounting.

- Integrated suspension, can be mounted horizontally or vertically
- Passive membrane for bass reinforcement
- Fiber-reinforced kraft paper - high rigidity with light weight leads for reduced distortion and clear sound
- Protection class: IP20 (indoor use)
- Rounded edges support the design claim
- Now with a protective grille instead of a fabric front cover


## Technical data

<b>Type</b>	2-way
<b>Rated power</b>	50W
<b>Maximum power</b>	80W
<b>Frequency range</b>	50Hz...25kHz
<b>Crossover frequency</b>	2,2kHz
<b>Nominal impedance</b>	8 Ohm
<b>Sensitivity</b>	86dB
<b>Ambient temperature</b>	-30...70°C /-22...158°F
<b>Humidity</b>	max. 95% r.H. (non condensing)
<b>Tweeter dome material</b>	Silk
<b>Woofer cone material</b>	Fiber reinforced kraft paper
<b>Safety rating</b>	IP20

# Frequenzgang

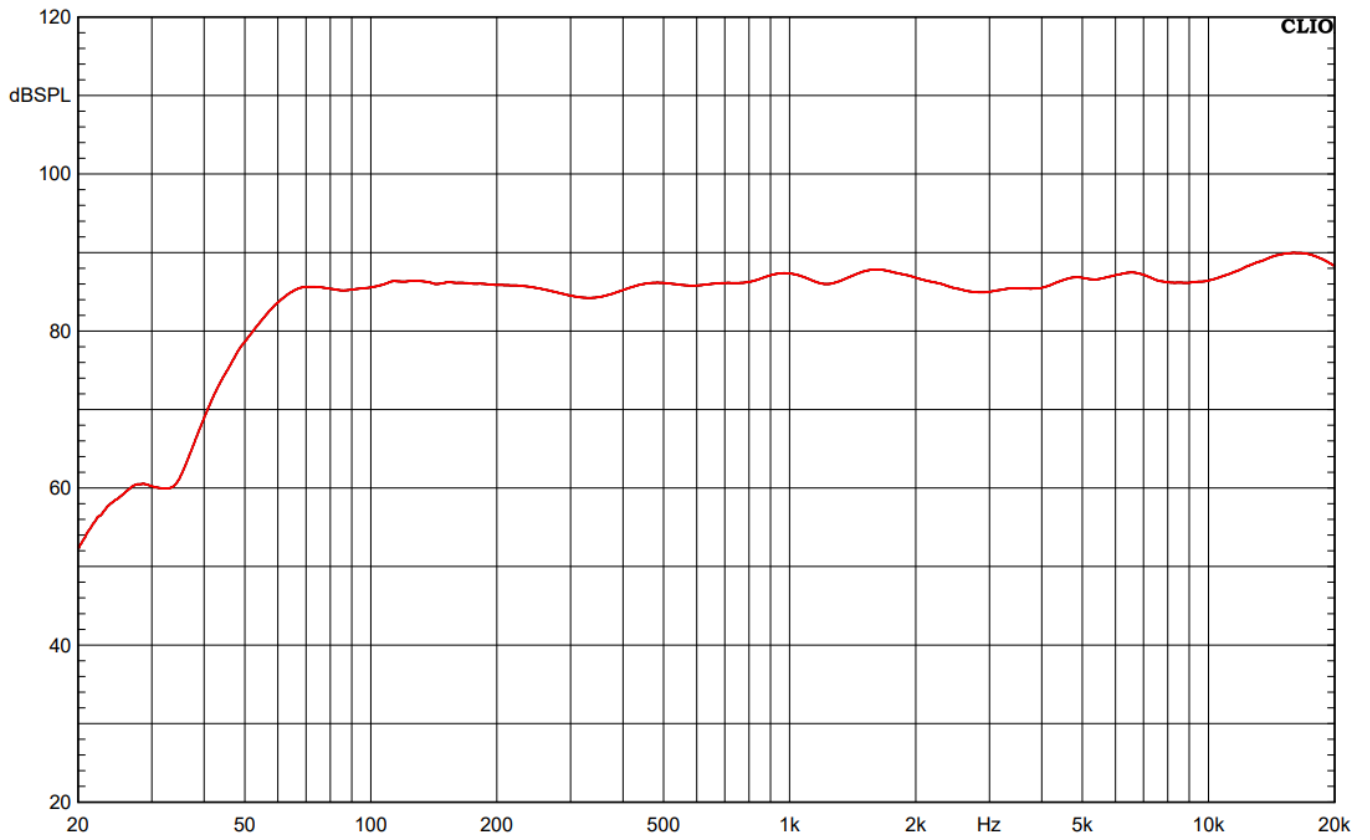

# Connection diagram

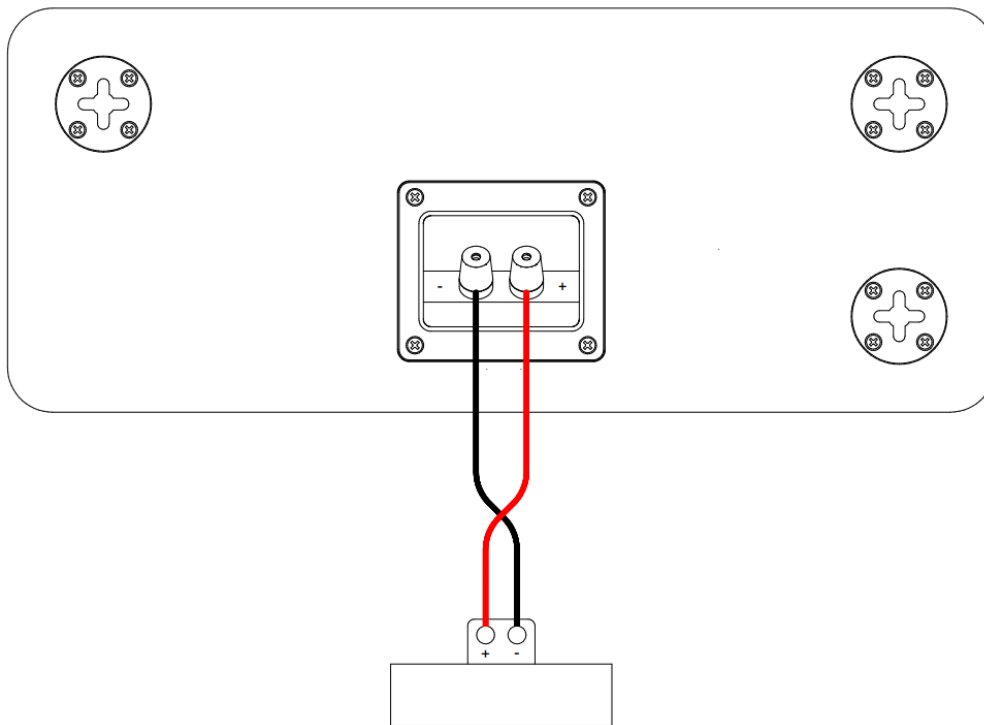

# Weight & dimensions

<b>Product dimensions</b>	440mm x 180mm x 112mm / 17.32" x 7.09" x 4.41"
<b>Carton dimensions</b>	510mm x 257mm x 184mm / 20.08" x 10.12" x 7.24"
<b>Product weight</b>	3,75kg / 8.27lbs
<b>Gross weight</b>	4,75kg / 10.47lbs
<b>Drawing</b>	<p>The drawing shows a top-down view of a rectangular device with rounded corners. The overall width is 440mm and the overall height is 180mm. The internal width between two vertical lines is 354.6mm, and the internal height between two horizontal lines is 94.6mm. A central square component is shown with two circular elements inside. Below the main drawing is a side view showing a depth of 112mm and an internal depth of 100mm.</p>



## Über das Produkt


Der WALL Speaker ist ein flexibel einsetzbarer 2-Wege-Lautsprecher, der speziell für den wandnahen Einsatz entwickelt wurde. Der Speaker harmoniert perfekt mit dem Loxone Audioserver und kann durch die integrierte Wandaufhängung senkrecht oder waagrecht installiert werden. Alle Bauteile sind auf niedrige Verzerrungen und hohe Detailauflösung optimiert. Um das volle Potential des Lautsprechers zu entfalten, empfehlen wir eine Wandmontage

- Integrierte Aufhängung, Horizontal oder Vertikal montierbar
- Passiv Membran zur Bassverstärkung
- Schutzklasse: IP20 (Indoor Gebrauch)
- Faserverstärktes Kraftpapier - hohe Steifigkeit bei leichtem Gewicht führt zu wenig Verzerrung und klares Klangbild
- Abgerundete Kanten unterstützen den Designanspruch
- Jetzt mit Schutzgitter statt Stoff-Frontbespannung


## Technische Daten

<b>Typ</b>	2-Wege
<b>Nennbelastbarkeit</b>	50W
<b>Maximalbelastbarkeit</b>	80W
<b>Übertragungsbereich</b>	50Hz...25kHz
<b>Übergangsfrequenz</b>	2,2kHz
<b>Nennimpedanz</b>	8 Ohm
<b>Empfindlichkeit</b>	86dB
<b>Umgebungstemperatur</b>	-30...70°C /-22...158°F
<b>Luftfeuchtigkeit</b>	max. 95% r.H. (nicht kondensierend)
<b>Hochtöner Kalotten Material</b>	Seide
<b>Tieftöner Membran Material</b>	Faserverstärktes Kraftpapier
<b>Schutzart</b>	IP20

# Frequenzgang

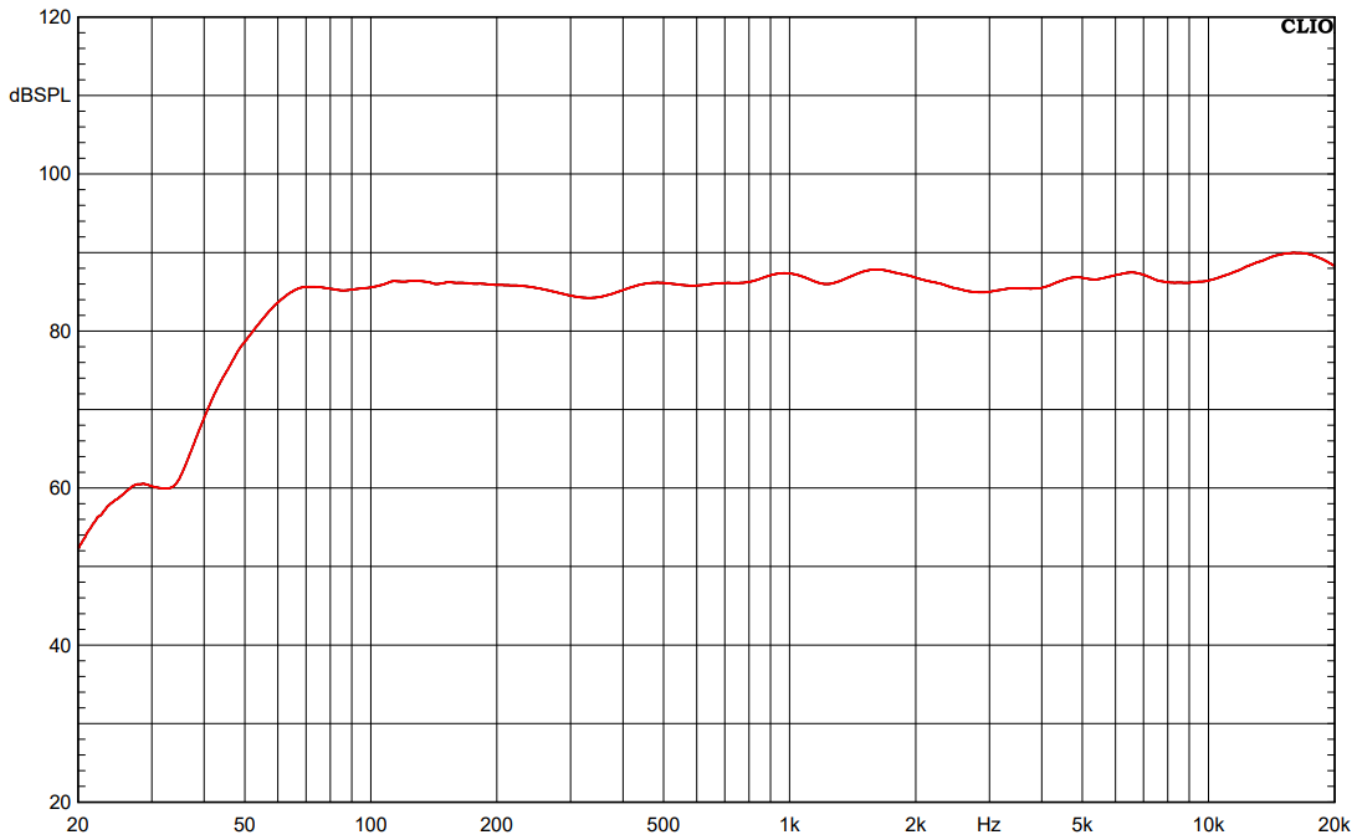

# Anschlussplan

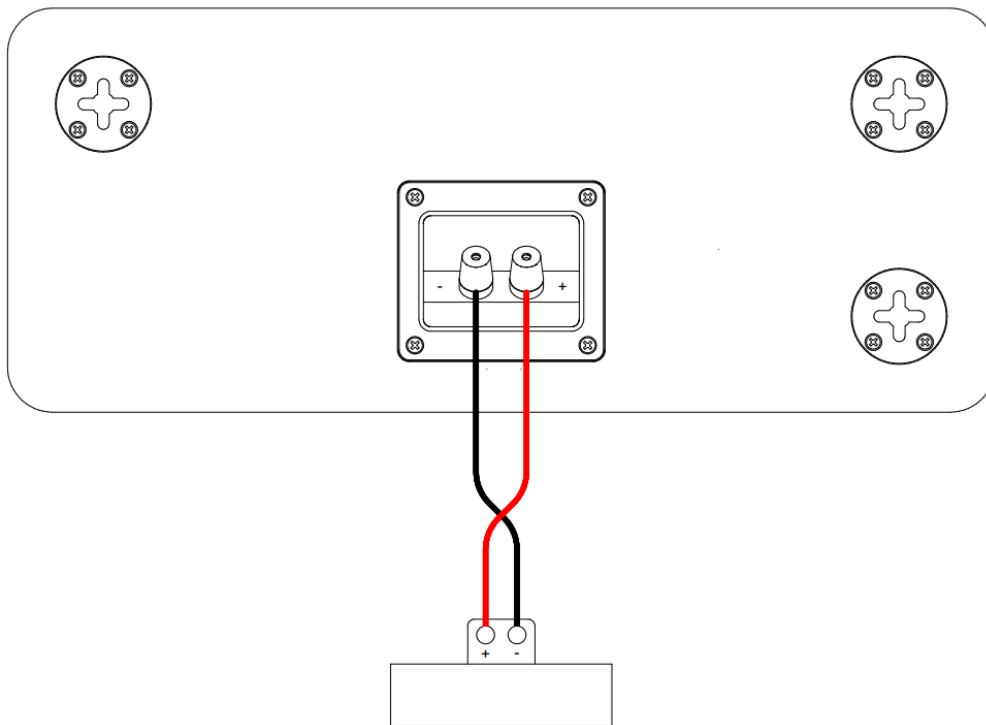

# Gewicht & Abmessungen

<b>Produktmaße</b>	440mm x 180mm x 112mm / 17.32" x 7.09" x 4.41"
<b>Kartonmaße</b>	510mm x 257mm x 184mm / 20.08" x 10.12" x 7.24"
<b>Produktgewicht</b>	3,75kg / 8.27lbs
<b>Gesamtgewicht</b>	4,75kg / 10.47lbs
<b>Maßzeichnung</b>	